


# Contractor Environmental, Health, Safety & Training (EHS&T) Manual

## Table of Contents

**Section 1 – General Safety Philosophy and Expectations**

1.1 Introduction
1.2 Definitions
1.3 General Requirements
1.4 Drug and Alcohol Program
1.5 Housekeeping
1.6 Water / Dock Safety
1.7 Vehicle Safety and Control
1.8 Contractor and Visitor Orientation
1.9 Process Safety Management (PSM)
1.10 Field Execution Meetings (Safety Meetings)
1.11 Security Requirements
1.12 Assessments and Inspections
1.13 Adverse Weather
1.14 Operator Qualification (OQ) Program

**Section 2 – Incident Reporting and Management**

2.1 Incident Notification

**Section 3 – Safety Procedures and Programs**

3.1 Chain, Sling, and Hoisting Equipment
3.2 Electrical Safety
3.3 Energy Isolation (Lockout/Tagout)
3.4 Excavation and Trenching
3.5 Fall Protection
3.6 Heavy Motorized Equipment
3.7 Ladder Safety
3.8 Confined Space Entry
3.9 Personal Protective Equipment (PPE)
3.10 Safe Work Practices—Tools and Equipment
3.11 Safe Work Practices in Classified Areas
3.12 Safe Work Permit System
3.13 Scaffolding
3.14 Stop Work Authority
3.15 Abrasive Blasting
3.16 Barricades

**Section 4 – Industrial Hygiene Procedures and Programs**

4.1 Industrial Hygiene
4.2 Asbestos
4.3 Benzene
4.4 Hydrogen Sulfide (H2S)
4.5 Lead
4.6 Naturally Occurring Radioactive Material
4.7 Mercury
4.8 Bloodborne Pathogens
4.9 Flammable and Combustible Materials

4.10 Hazard Communications
4.11 Hazardous Materials
4.12 Radiation Safety
4.13 Respiratory Protection
4.14 Heat Illness
4.15 Waste Handling – General Requirements
4.16 Waste Generation – Disposal

**Section 5 – Emergency Preparedness**
5.1 Fire Prevention
5.2 Fire Protection
5.3 Emergency Action Plans and Alarms
5.4 Medical Treatment and First Aid Services

**Section 6 – Operations and Maintenance**
6.1 Job Plan
6.2 Preparation of Equipment and Systems for Maintenance and Repair
6.3 Cutting Underground Lines
6.4 Safe Operation of Vacuum Trucks
6.5 Greenfield and Brownfield Determination
6.6 Utilities (Electrical Lines, Power, Water, and Fuel)

**Section 7 – Environmental**
7.1 General
7.2 Spill Prevention and Control
7.3 Discharge to Storm-water Conveyance Systems
7.4 Erosion Control
7.5 Excavation Activities in Environmentally Restricted Areas
7.6 Open Burning
7.7 Working Near Waterbodies and Wetlands

# Section 1 - General Safety Philosophy and Expectations

## 1.1 Introduction

Enterprise Products (Company) strives, at all times, to maintain a safe and healthy workplace for our employees, Contractors, and the communities in which we operate. Company relies on all parties to maintain a healthy and safe work environment.

This document was developed to convey, to applicable third party Contractors (i.e. Contractors, Subcontractors, Inspectors, ROW agents, contract employees, etc.) and all other interested parties the basic Company health, environmental, safety, and training (EHS&T) processes that apply to work conducted on Company property or while representing Company. This manual is not intended to replace or circumvent any applicable health and safety standards as stipulated by federal, state, or local regulations or Contractor requirements that are found to be equal to or exceeding the requirements of this document.

In accordance with the applicable agreement under which Contractor is providing work or services to Company, all Contractors performing work on behalf of Company are considered 'Independent Contractors' in all matters related to the safety and health of their employees. Company personnel shall not stipulate and/or direct Independent Contractor/Subcontractor personnel to operate and/or work in a manner that is contrary to established safety rules and regulations. The requirements of this Contractor Safety Manual shall be incorporated in its entirety as integral terms and requirements under the applicable service or construction agreement between Company and Contractor. In all cases where Contractor and Company requirements conflict Company's requirements shall take precedence.

Company would like to thank you, in advance for making a commitment in insuring the safety and health of your employees, our personnel, and our communities.

| NOTE | **No variance from these requirements shall be permitted without prior review and written approval by the Company Operations, Environmental, and Safety Departments.** |
|---|---|

## 1.2 Definitions

1. Where used in this Contractor EHS&T Manual, the words listed below shall have the meanings indicated:

   **Assembly Area (Muster Point/Rally Point):** The predetermined safe location to which all persons evacuate in an emergency. Reference Emergency Response Plan (ERP)

   **Authorized Person:** A person approved or assigned by the employer to perform a specific type of duty or duties or to be at a specific location or locations at the jobsite. (Reference OSHA 1926.32)

   **Authorized Representative:** A Company employee/representative properly trained and authorized by the facility/work location supervision to issue Safe Work Permits.

**Company**: The term "Company" will be used throughout this document to identify Enterprise Products, LLC; Dixie Pipeline Company, Enterprise Crude, and its parent and subsidiaries.

**Company Representative**: Any person employed and designated by Company as the responsible person for a Contractor, while that Contractor is working at Company's facilities.

**Competent Person**: An individual who is capable of identifying existing and predictable hazards in the surroundings or working conditions which are unsanitary, hazardous, or dangerous to employees, and who has authorization to take prompt corrective measures to eliminate them. By way of training and/or experience, a competent person is knowledgeable of applicable standards, is capable of identifying workplace hazards relating to the specific operation, and has the authority to correct them. (Reference OSHA 1926.32)

**Contractor**: Any company or person contracted to perform short or long-term work for the Company. References to Contractor include Contractor's workers, subcontractors and third party inspectors and consultants.

**Contractor Employee**: An individual employed by the contracting company

**DOT**: U.S. Department of Transportation, the entity responsible for the Pipeline Hazardous Materials and Safety Administration (PHMSA).

**Excavation**: Any man-made hole, cavity, trench or depression in the earth surface formed by earth removal by any means.

**Exposure Limit(s)**: Concentration limits of airborne contaminants established by OSHA, also termed Permissible Exposure Limits (PEL), Short Term Exposure Limit (STEL) and Time Weighted Average (TWA). (Reference NIOSH/OSHA)

**Employee(s)**: An individual employed by Company.

**Facility(s)**: Includes Company property such as: terminals (tanks farms and truck loading), marine terminals/docks, plants, and pipeline systems (e.g. valve stations, compressor stations, pump stations and Rights of Way).

**Incident**: An event involving Company personnel or Contractor personnel, assets or located on Company facilities with either a consequence or has a reasonable potential to result in a consequence involving Health, Safety and Environmental to include near-misses.

**Injury or Illness**: An occupational injury or illness is an abnormal condition or disorder. Injuries include cases such as, but not limited to, a cut, fracture, sprain, or amputation. Illnesses include both acute and chronic illnesses, such as, but not limited to, a skin disease, respiratory disorder, or poisoning.

**Near-miss**: An undesired event or a condition that, under slightly different circumstances, could have resulted in injury, damage or other loss.

**NFPA**: National Fire Protection Association

**OSHA**: Occupational Safety and Health Administration

**PHMSA**: Pipeline and Hazardous Materials Safety Administration

**Primary Authorized Employee**: A company employee with primary responsibility for implementation and coordination of the overall lockout/tagout of hazardous energy sources for machine or equipment repair and servicing and the corresponding "SF-48 Isolation/Blind List". The Primary Authorized Employee's personal lock is the first lock on and the last lock off the lock box or job board.

**Principal Authorized Employee**: A Company or Contractor authorized employee who oversees or leads a group of servicing/maintenance employees and can be designated to verify the lockout/tagout and will document verification by initialing next to each employee they are responsible for on the "SF-48 Isolation/Blind List".

**Pyrophoric Materials**: Iron sulfide deposits that are formed in process vessels, process piping/pipelines and storage tanks when hydrogen sulfide ($H_2S$) reacts with metal surfaces in atmospheres with little or no oxygen. These deposits will oxidize rapidly when exposed to air and can produce sufficient heat to ignite hydrocarbon-air mixtures.

**Qualified**: A person who, by possession of a recognized degree, certificate, or professional standing, or who by extensive knowledge, training and experience, successfully performing the given task(s) and demonstrating the ability to solve/resolve problems relating to the subject matter, the work, or the project. (OSHA 1926.32)

**Scope of Work (SOW)**: All labor, goods, materials, and services required to be performed and/or furnished by Contractor under the agreement.

**Sub-contractor**: Contractor employed by another contractor (or prime contractor) who works for Company. They shall be considered part of the contract workforce and so shall be the responsibility of the overseeing contractor.

**Work**: Any and all services, acts, obligations, duties and responsibilities necessary to the successful completion of the project assigned to or undertaken by Contractor under the contract documents, including the furnishing of all labor, services, materials, equipment and other incidentals.

## 1.3 General Requirements

1. Any Contractor who provides a service to Company is required to have an "Approved" Master Service Agreement (MSA). Approval for any MSA is required by each of the following groups:

   - Contracts Administration
   - Safety Department
   - Risk Management
   - Compliance Department (Drug & Alcohol)
   - Legal Department

2. All work to be conducted must be listed within Contractor's Scope of Work and must contain any potential or specialized services to include but not limited to:

   - Abatement Services (Asbestos/Lead)
   - Horizontal Directional Drilling/Boring
   - Rescue (3rd Party Confined Space Rescue Services)
   - Spill Response/Emergency Response
   - High Voltage (>600 Volts)
   - Hot Tap/Stopple services

3. All Contractors are required to participate in Company's Contractor Safety Pre-Qualification Process. As part of the MSA process, each Contractor will subscribe to ***ISNetworld (ISN)***.

4. The Contractor EHS&T Manual is offered by Company as an addition to Contractor's own safety program applicable to the work covered by its contract. This manual is not intended to take the place of Contractor's own (more stringent) safety policies or procedures. This Manual is provided via the following processes:

   - Upon issuance of the initial Enterprise Products MSA; and
   - An electronic copy can be obtained via the Enterprise Products ISN Bulletin Board.

5. Contractor must have and maintain a self-administered comprehensive safety program when performing work for Company.

6. Contractor must to comply with all applicable governmental statutes, standards, and regulations as well as Company safety procedures and practices while performing work in any facility.

   - Contractor shall protect all property and personnel including Contractor employees, Company employees, other contractor and subcontractor employees, and the general public against any adverse effects of the work it is performing.
   - Contractor is be responsible for enforcing among its employees all rules, regulations, and instructions regarding the prevention of fires and accidents, use of drugs and alcohol, signs, advertisements, social media, boundaries of working areas, smoking, housekeeping, and other general requirements outlined in this EHS&T Manual.

7. Contractor shall communicate to all personnel that explosives or weapons are <u>strictly forbidden</u> at, upon, or within Company facilities.

8. Violation of and/or refusal to comply with any of the requirements set forth in this Contractor EHS&T Manual may result in termination of Contractor's right to proceed with its contract.

   - Any work delay due to violation of safety requirements shall be at Contractor's expense.

9. Company reserves the right to establish additional safety requirements appropriate or necessary to ensure the safety of all persons and property.

10. Contractor shall be notified of any changes and/or new safety requirements that may impact its work performance.

11. Verbal Communication - A daily briefing should be conducted between Contractor's on-site supervisor and Company's Contractor Sponsor to discuss work progress, any changed safety/environmental conditions, and any safety/environmental related matters experienced by Contractor in the course of performing its work. Any Contractor personnel who cannot read shall be provided a liaison.

12. Bilingual Communications - To ensure safe work conditions, it is essential that verbal communications between Company's representatives and Contractor personnel be clear and free from misinterpretation. Any Contractor personnel who do not speak or understand English shall be provided bilingual supervision by Contractor.

13. Radio Communication - Before any contractor can bring radios into a facility, they must show the FCC license and provide verification that the frequency/programming information used has been approved by Company's Communications and/or Safety Department.

## 1.4 Drug and Alcohol Program

1. Contractor must have a Drug and Alcohol Program (Non-DOT program). If the work activity is performed on a PHMSA jurisdictional asset or facility, a DOT Drug and Alcohol Program (D&A) is also required. Contractor shall ensure the following:

   - Review and inform its personnel of the program;
   - Administer and enforce their independent program;
   - Require their Subcontractors to be in compliance with a similar program and list the Subcontractor employees on the National Compliance Management Services (NCMS) database; and
   - Provide documentation of D&A compliance as requested.
   - All Contractors and their Subcontractors have a current negative drug screen (within one year of date of service).

2. Controlled Substances, Alcohol

   - The possession and/or being under the influence of Company prohibited, illegal, or controlled substances at Company facilities or while performing work for Company is prohibited. This includes alcohol and the illegal use of any mood or mind altering substances (herbal, manufactured, or synthetic). Also included is the abuse of prescription or over-the-counter drugs.
   - Drug related paraphernalia is prohibited.

3. Company reserves the right to require, reasonable suspicion, post-accident or unannounced wall-to-wall drug and/or alcohol tests to all Contractor and Subcontractor employees working at a facility.

## 1.5 Housekeeping

During the course of the designated work all debris, tools, building materials and other obstructions shall not be allowed to accumulate in work areas, passageways, doorways, stairs, or in and around buildings and/or other structures. Contractor and/or Subcontractor must manage all tools, equipment, and materials in a way that is conducive to maintaining a clutter-free work environment.

**Sanitation**
Each Contractor/Subcontractor shall maintain their respective work areas in a manner that facilitates acceptable hygiene practices. Maintain and control refuse in appropriate containers that can be closed to prevent the migration of waste via wind or animals. Keep eating and break areas free from accumulations of wastes. All waste materials shall be disposed of in accordance with applicable local, state, and/or federal regulations.

## 1.6 Water/Dock Safety

**Note: All Contractor personnel must meet the Security Requirements for working at the Marine Terminal. Transportation Workers Identification Credential (TWIC) is required as per the Maritime Transportation Security Act of 2002, US Coast Guard, and international port security regulations. This requires all individuals to have a current TWIC card before being allowed access to the Marine Terminal or be escorted by a TWIC cardholder. Any individual without a TWIC card must have a side-by-side escort.**

1. Those Contractors entering a Marine Terminal must follow the requirements listed in Section 1.15 Security Requirements.

   - Cargo and material shall not obstruct access to vessels, cranes, vehicles or buildings. Means of access and egress within the buildings shall be similarly unobstructed.
   - Dunnage, lumber, or shoring material in which there are visibly protruding nails shall be removed from the immediate work area or if left in the area, the nails shall be rendered harmless.
   - The employer shall eliminate, to the extent possible, conditions causing slippery working and walking surfaces immediate work areas used by employees.

2. Maritime ports and facilities follow the U.S. Coast Guard (USCG) threat advisory system. The Maritime Security (MARSEC) Levels are set at one of three (3) levels. The current MARSEC Level shall be posted on signs at access points or other common locations within the facility.

3. Cargo handling operations shall not be carried on when noise-producing, maintenance, construction or repair work interferes with the communication of warnings or instructions.

4. Contractors working over or near water, where the danger of drowning exists, shall provide to their employees U.S. Coast Guard-approved life jacket or buoyant work vests with no defects.

5. Ring buoys with at least 90 feet of line shall be provided and readily available for emergency rescue operations. Distance between ring buoys shall not exceed 200 feet.

6. Where individuals are working over or adjacent to water, a means of exit from the water should be available (dock ladder, skiff, or other means of exit).

## 1.7 Vehicle Safety and Control

**Note: Driving within a facility or on Company property is a privilege and not a right. If at any time these guidelines cannot be followed, driving privileges may be revoked.**

1. Only identified Contractor-owned or leased vehicles with insurance in accordance with Company requirements shall be allowed entry into a facility.

   - Personal vehicles of contractor personnel shall not be permitted to enter a facility.

2. Designated parking lots or areas for Contractor personal vehicles shall be provided.

3. Contractors driving in facilities shall not exceed posted speed limit.

***Safe Parking***

1. The following parking practices will be used by all personnel in order of priority based on the configuration of the parking lot/space:

   - Pull through so that the vehicle can depart pulling forward through the space.
   - If pulling through is not possible then back in so the vehicle can depart pulling forward from the space.
   - Only in situations where the parking configuration does not allow pull through or back in (i.e. angled or parallel parking) shall pulling forward into a parking space be allowed.

***Work Zone Traffic Safety***

1. Contractor shall maintain all roadways, walkways, and railroad sidings in a safe, passable condition during the progress of the job.

2. Contractor personnel in field operations are sometimes required to set up work zones near public roadways.

3. Typical precautions include setting up cones and warning signs, proper communications systems and flagging signals, FRC reflective worker's vests and warning lights on vehicles.

***All-Terrain Vehicles (ATV) and Utility Vehicle (UTV)*** *(Mule, Ranger, Snowmobile, Golf Cart, etc.)*

**Note: Driving an ATV/UTV within a facility or on Company property is a privilege and not a right. If at any time these guidelines cannot be followed, driving privileges may be revoked.**

1. ATVs include any motorized off highway vehicle traveling on four (4) or more low pressure tires, having a seat straddled by an operator and a handlebar for steering control.

2. UTVs include any motorized off highway vehicle traveling on four (4) or more low pressure tires, having side by side seating, roll-bar, seat belts and a steering wheel control.

3. All ATV/UTVs will have manufacturer warning placards affixed to the vehicle.

4. ATV/UTVs are not to be operated on public maintained highways or streets.

5. Proper Personal Protective Equipment (PPE) shall be worn when operating an ATV or UTV. This includes:


   - A DOT, Snell or ANSI approved helmet with face shield and/or impact resistant goggles (helmet - ATV only).
   - Long sleeved shirt and long pants or fire resistant clothing as necessary.
   - Proper gloves. Leather or heavy cotton work gloves are suitable.
   - Safety Toed Boots that fit over the ankle.
   - Other PPE applicable to the type of work being performed.

6. Never operate at speeds on inclines too fast or too steep for the conditions for safe operation. Refer to the Owner's Manual for manufacturer's recommendations for safe operation.

## 1.8 Contractor and Visitor Orientation

1. **Safety Orientation** – Each Contractor employee (including supervision) will participate in a Contractor safety orientation and a site-specific safety orientation.

   - The general safety and site-specific orientation format may include a verbal, video or CBT presentation.

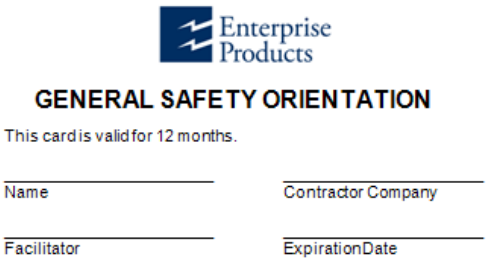


**Example A: Wallet Card**




**Example B: Hardhat Sticker**

2. Contractor personnel are to remain in their assigned work area where the work is being performed, access to other areas of the facility or into other operating areas is prohibited.

3. For those areas utilizing online training such as Safety Councils or ISN, a badge shall be issued as proof of safety orientation completion.

## 1.9 Process Safety Management (PSM)

All Contractors and Subcontractors executing work, Construction/Maintenance or otherwise, at facilities regulated by OSHA 29 CFR 1910.119 and/or 1926.64 shall obtain a copy of the applicable Company safety guidelines for Process Safety Management from their respective Company representative or by requesting a copy from the Corporate Safety Department.

Contractors working at a facility under the jurisdiction of PSM and/or RMP must comply with all regulatory requirements. Contractors working on or around the covered process in a PSM and/or RMP facility are required to:

Provide its personnel information on the hazards of the process and the applicable provisions of the emergency action plan.

- Train personnel to safely perform assigned tasks.
- Assure personnel follow facility safety rules.
- Advise Company of any special or unique hazards associated with its work on the covered process.

Contractor will receive written approval by a Company representative prior to any portable building(s) or tents being brought onto a facility. This will ensure the building complies with Company's Facility Siting Policy.

## 1.10 Field Execution Meetings (Safety Meetings)

1. Safety toolbox / tailgate meetings or similar type meetings must be held at the beginning of each workday, to review any pertinent hazards, requirements for safe work performance, and raise the awareness level of affected personnel. Contractor will maintain written documentation of all safety meetings to include date, names of attendees, and subject materials covered.

## 1.11 Security Requirements

***Security Requirements (Facility and Contractor)***

**Note: Authorities will be notified if any counterfeit identification document is used to gain access to a facility.**

Each person requesting entry to Company property must possess the appropriate credentials (e.g. personal identification, TWIC card). Contractor/Subcontractor personnel shall not roam around Company facilities or occupy and/or pass through areas outside of their designated areas. All vehicles and personal property brought on to Company sites are subject to security screening.

1. Restricted Areas shall be designated by signs at the facility or the entire facility may be designated as a Restricted Area.

## 1.12 Assessments and Inspections

1. Inspection of all contractor work sites may be conducted by Company employees at any time.

## 1.13 Adverse Weather

1. Contractor shall not perform tasks in weather (including high wind) which could affect the safety of their employee(s) until an "All Clear" has been given by the facility personnel.

## 1.14 Operator Qualification (OQ) Program

1. All Contractors and Subcontractors will be in compliance with Company's Operator Qualification program plan when performing Covered Tasks on DOT jurisdictional pipelines.

2. Documentation - Contractors and Sub-Contractors will submit to Company's employee qualification documentation through ISNetworld. ISNetworld Operator Qualification documentation must be the most current report and the report must include Enterprise Products in the header.

3. Company reserves the right to suspend a person's qualification at any time.

# Section 2 – Incident Reporting and Management

## 2.1 Incident Notification

1. All incidents must be documented and reported to the appropriate Company Representative immediately or as soon as practical after the event has occurred, but at no greater interval than twenty-four (24) hours after occurrence. All incidents that result in a work place injury and all serious Near Miss incidents shall be investigated.

2. What to Report - Report the fact that an incident has occurred and the circumstances surrounding the incident, and record the following:

   - Who was involved,
   - What occurred,
   - When – date/time,
   - Where it occurred,
   - How it occurred
   - Assessment/status of conditions, and
   - Corrective action being initiated at the time.

3. The incident investigation report, including corrective actions, shall be submitted to Company upon completion not to exceed 48 hours or agreed upon timeline with Company.

# Section 3 – Safety Procedures and Programs

## 3.1 Chain, Sling, and Hoisting Equipment

1. Contractor personnel who will be using chains, hoists, hooks, slings or other rigging equipment must notify the appropriate local Authorized Representative.
2. All lifting chains, slings, and cables and associated attachments (e.g. hooks, d-rings, shackles, etc.) shall be inspected, utilized, and removed from service as required by applicable OSHA requirements (i.e. General Industry1910.184, Construction 1926.251) in addition to the following:

   - Chains, slings, cables and all lifting attachments (e.g. hooks, d-rings, shackles, etc.) that have been shock loaded and/or utilized for purposes other than vertical lifts (e.g. pulling, tugging, bundling, etc.) shall be marked and prohibited from use as a vertical lifting device.
   - The possession and/or use of 'home-made' and/or 'shop-made' lifting devices is strictly prohibited.

## 3.2 Electrical Safety

**Note: This policy is intended for electrical workers. For administrative building electrical components less than 120V, and no Qualified Employees available, site specific procedures shall be developed that identify employees and provide safe energization instructions.**

Affected Contractors / Subcontractors shall be responsible for implementing all electrical safety requirements in accordance with appropriate OSHA (1910 Subpart S, General Industry or 1926 Subpart K, Construction) and National Fire Prevention Association (NFPA 70E) requirements.

1. Training requirements shall comply with Company and NFPA 70E training requirements. Only Qualified Person(s) shall be permitted to work on energized electrical equipment.

**Important: The definition of a Qualified Person as an electrical worker as defined in paragraph 1910.339 of the OSHA Standards states: A "Qualified Person" is one who is familiar with the construction and operation of the equipment and the hazards involved.**

**OSHA 1910.331 through 1910.335 as well as NFPA 70 (National Electrical Code) and NFPA 70E (Standard for Electrical Safety in the Workplace) specifically describes the training, skills, techniques and knowledge requirements of a "Qualified Person" and shall be reference for details.**

2. **Electrical Safety Principles**

- De-energization is the preferred method of protecting employees from electrical hazards. Whenever possible, electrical equipment must be placed in a Zero State of Energy - Safe Work Condition before work is started (refer to 3.3 Energy Isolation).
- If de-energization is not feasible or creates a greater hazard, electrical safe work practices and personal protective equipment must be used to protect employees as approved by a Company representative.
- Only qualified employees shall be permitted to work on electrical conductors or circuit parts that **have not** been put into an electrically safe work condition, and only under a properly executed ***Energized Electrical Work Authorization (SF27).***

3. When Contractors or other employees are engaged in electrical work, Company's employee in charge shall conduct a meeting between Company's representatives and other Contractors using *Electrical* ***Job Briefing and Planning Checklist*** **(SF32**).

4. Contractor Responsibilities:

**Two (2) Qualified People must be at the job site when performing non-exempt exposed energized work on equipment above 600v; of which one of the employees has been trained in CPR/First Aid and rescue in the event a person is in contact with a live conductor.**

5. Contractor will ensure Ground Fault Circuit Interrupters (GFCI) is used when using cord connected portable power tools or other cord connected equipment is used.

6. Contractors doing work for Company must have an assured equipment grounding program that meets or exceeds Company's program.

## 3.3 Energy Isolation (Lockout/Tagout)

1. Contractor shall ensure compliance with OSHA 29 CFR, Part 1910.147 - "Control of Hazardous Energy".

2. A *Principal Authorized Employee* can be utilized when a group (i.e. Contractor, crew, craft, department, etc.) is involved in servicing/maintenance as follows:

   - Will verify that all equipment is properly locked and tagged out as per the "SF-48 Isolation/Blind List".
   - Will verify that isolation and de-energization of the machine or equipment have been accomplished.
   - Once verification is complete, the Principal Authorized Employee shall initial next to their name as well as next to each employee's name that is being verified for on the "SF-48 Isolation/Blind List".
   - Will apply their personal lock and tag to the lock box or job board.

3. Each *Authorized Employee* (Company or Contractor) prior to performing servicing and/or maintenance on the equipment or system will:

   - Verify that all job locks and tags have been placed on all isolation points per the Isolation/Blind List, unless a *Principal Authorized Employee* has been utilized.
   - Verify that isolation and de-energization of the machine or equipment have been accomplished unless a *Principal Authorized Employee* has been utilized.
   - Verify the job lock key is secured in the lock box or on the job board.
   - Attach their personal lock and tag on the lock box or job board.
   - Place their initials and date in Section E of the ***"Isolation/Blind List"*** to verify that their personal lock and tag has been installed on the lock box or job board.

4. Contractor will provide personal metal locks (individually keyed) and tags (w/ employee name and date) to be placed on a Company lock box or job board.

5. Personnel performing/completing the job will inform the *Primary Authorized Employee* that the work has been completed and personal locks and tags have been removed from the lock box or job board.

6. When an individual who applied their personal lock and tag to the lock box or job board is not available to remove it, that lock may be removed under the direction of Company Supervision.

## 3.4 Excavation and Trenching

- Prior to the disturbance of topsoil or any other ground coverings (i.e. concrete, asphalt, grass, tree removal, etc.) the appropriate state One Call system shall be notified and all

underground encumbrances marked by the appropriate asset owner (e.g. electrical company, phone company, municipal entities, etc.). Work that includes the disturbance of any type of ground covering shall not commence prior to accomplishing this requirement.

- All excavation, trenching and shoring activates, regardless of classification (i.e. General Industry, Construction) shall adhere to the requirements set forth in 29 CFR 1926 Subpart P. An OQ qualified person must be on site to monitor the excavation activities. Additionally, each Contractor shall provide an excavation permit detailing ground conditions, integrity control methods and compliance parameters. Each permit shall be completed by a designated Contractor/Subcontractor Excavation Competent Person and posted at or in close proximity to the affected excavation areas.

- All activities covered by this section shall be subject to the implementation of 'Soft-Dig' methods when excavating within 18" of existing facilities or as designated by state regulations. Contractors should reference the appropriate states current tolerance zone.

- Soft dig methods are utilized to minimize the likelihood of damaging existing facilities and may include, but are not limited to, hand digging, probing and hydro-vacuum operations.

- Excavation, trenching, and shoring activities that do not meet the stipulated requirements of 1926 Subpart P and/or that will be > 20 feet in depth shall be designed and approved by a Professional Engineer (PE) with the request knowledge and experience to safely design such systems. All documentation shall bare the seal of the applicable PE and be maintained at the excavation location or in close proximity to the affected area.

- When excavating pipeline(s) for any type of foreign pipeline crossing, maintenance or inspection activity, the excavation is done parallel to the existing pipeline(s).


  - Digging perpendicular to the pipeline is prohibited until the line is exposed.
  - All excavation work is suspended if any unidentified line is discovered.
  - Authorization to resume excavation is given by a Company representative.

- Contractor shall erect and maintain, as required by OSHA standards, temporary barricades around ditches and excavations. If the excavation is to be left open overnight or for an extended length of time, Contractor will construct a rigid barricade and ensure it is adequately protected and visible.

**Note: During the construction of protective systems, a copy of designs or tabulated data shall be at the jobsite, and readily available during construction.**

**Tolerance Zone**

1. A minimum of 18 inches from the outer edge of the pipe (in all directions), or as defined by State regulations, whichever is greater.

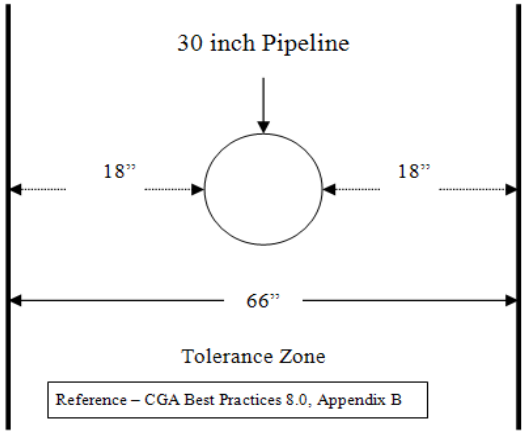


**Mechanical Excavation within the Tolerance Zone**

1. Mechanical Excavation within Company's defined tolerance zone may be allowed as long as **all** of the following conditions have been met;

2. Field Engineering or Operations develop a written job plan; including the use of special attachments (i.e. hammer hoes, tampers, augers, etc.).

   - Special attachments, including any part of the powered equipment, may not be used within 6 inches of any in-service underground pipeline or facility.
   - The use of hammer hoes, or similar attachments, within the tolerance zone of energized underground pipelines shall be limited to Integrity rehab projects where it is necessary to provide clearance to properly inspect and repair anomalies or where stopples must be installed with the pipeline in-service. Other activities require a Variance to this policy and section in accordance with 1.4-*Safety Policy Change and Variance Process.*


3. The pipeline(s) must be free of buried side taps, split tees, or other buried appurtenances in the area being excavated.

   - If **any buried side taps, split tees or appurtenances exist or potentially exist**, **no** mechanical equipment can be used inside the tolerance zone;
   - If **no** ILI data or alignment sheets exist, **no** mechanical equipment can be used inside the tolerance zone.


4. A Company representative, COR or Inspector must notify the local Operations Supervisor and Pipeline Control Center prior to the Excavator beginning.

| NOTE | Mechanical excavation inside the tolerance zone of in-service pipelines should only be performed by an experienced Competent Equipment Operator who is proficient with the equipment and attachment(s) being used. |
|---|---|


6. After it has been determined there are no, buried side taps, split tees or other buried appurtenances on the pipeline(s), mechanical excavation is then allowed to within 18 inches of the top of pipe (TOP);

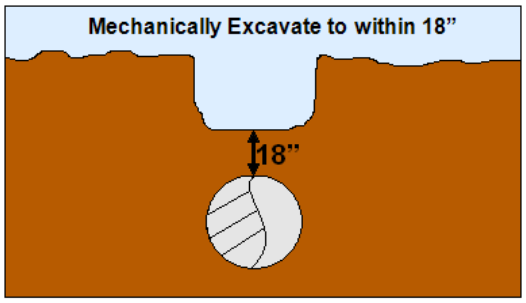


7. Once within 18 inches, the TOP must be exposed via hand digging or vacuum excavation until the TOP is continuously exposed and sides of pipe identified via probe bar(s);

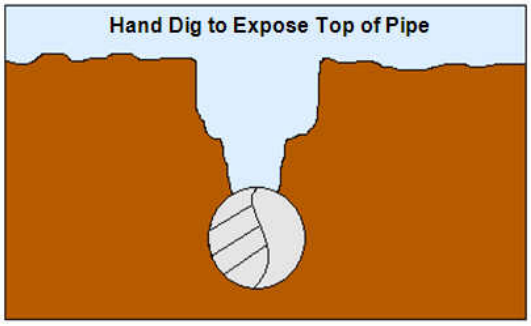


8. With the TOP exposed, and sides of pipeline identified via probe bars, mechanical excavation can begin to within 6 inches of the outer edge of the pipeline(s);

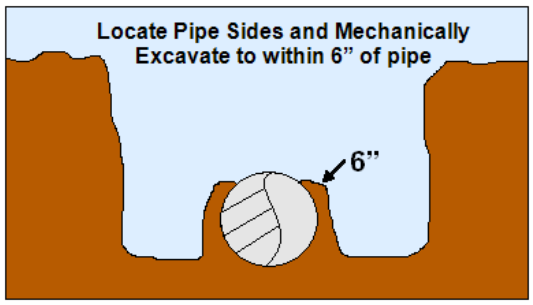


9. Remaining 6 inches of soil must be removed via hand digging or vacuum excavation.
10. No track-hoe with a hydraulic excavator shall be allowed to be used on any project or excavation job with quick-connect couplers unless the excavator has been retrofitted to allow the safety pin to be manually inserted behind the front and/or rear lever of the coupler assembly.
11. When soil conditions permit, all backhoe buckets used by contractors for excavation near existing facilities or equipment must have a safety bar across the “teeth” to prevent line snagging that may cause damage to line and/or coatings.

- In addition, “side-cutters” may need to be removed from the bucket if soil conditions permit.
- Company’s Operations Supervisor or Designee must approve the use of teeth and/or side-cutters.

## 3.5 Fall Protection

1. Contractor shall ensure that fall protection systems (e.g., guardrail, safety net, or personal fall-arrest) provided or installed by Contractor meet the criteria and practices listed in OSHA 29 CFR 1910 Subpart D – Walking-Working Surfaces, Subpart I – Personal Protective Equipment and 1926, Subpart M - Fall Protection.

2. All components of any designated Fall Arrest Systems (harness, connectors, lanyard, yo-yos, anchor points, lifelines, guardrails, hole covers, safety nets, etc.) shall be inspected prior to use and as needed during use to insure the integrity of the system. All defective components of personnel fall arrest systems must be immediately removed from service and tagged and/or decommissioned in a way that prevents use.

3. All Contractor personnel shall wear an approved full-body harness with shock absorbing lanyard(s), when performing construction activities at a height of 6 feet to the heel or higher.

4. Standard protection against falls is achieved when adequate safeguards are in place including compliance with a 100% tie-off rule when work is to be performed from unprotected sides or edges, scaffolds, man lifts, aerial platforms and personnel baskets.

## 3.6 Heavy/Motorized Equipment

1. Contractor is responsible for properly inspecting all motorized equipment in accordance with OSHA or other applicable standards.

2. This inspection shall include all cables, wire rope, braking devices, hydraulic cylinders, and other mechanical devices of the equipment.

3. Maximum load capacity shall be determined prior to setting materials or equipment on any temporary elevated structure or platform.

4. **Cranes**

   - Contractor must ensure that prior to operating any equipment covered under 29 CFR 1926 Subpart CC, the person is operating the equipment during a training period in accordance with 1926.1427(f), or the operator is qualified or certified to operate the equipment in accordance with 1926.1427(a).

     - All Contractors and their Subcontractors utilizing cranes, rigging and cribbing during execution of their work shall be solely responsible for the proper setup, inspection, operation, maintenance, and disassembly of said equipment. Contractor and/or Subcontractor management shall not allow untrained or unauthorized personnel to perform any activities involving the assembly, use, and disassembly of cranes, rigging and/or cribbing.

- All heavy crane lifts provided by third party contractors (e.g. columns, towers, vessels, and tanks) require weight calculations and lift equipment capacity verification.
  - The lifting contractor shall develop a lift plan and provide a copy to a Company representative for review and approval prior to any heavy lift.
  - All bridles, slings, and other devices used in making heavy lifts shall be inspected and certified by a registered professional engineer for proper condition and sizing for safely handling the determined load.
  - All lift loads shall be secured and guided with a tag line.
- All man-lift baskets will be test lifted, positioned to the desired work area with a test weight before any person is lifted and documented accordingly.
- When wind speed (sustained or gusts) exceeds 20 mph at the personnel platform, a qualified person must determine if, in light of the wind conditions, it is not safe to lift personnel. If it is not, the lifting operation must not begin (or, if already in progress, must be terminated).
- Precautions need to be taken when operating equipment near overhead utility lines.
  - Any overhead wire is considered to be energized until proven de-energized.
  - See OHPL above.
- An annual inspection meeting OSHA 29 CFR 1926 Subpart CC requirements is performed by a qualified person from the crane manufacturer or by an independent crane inspector at least every 12 months.

5. **Critical Lifting**

- Critical Lifting is a lift designated by Company or the lifting contractor or designee where the facilities or equipment available for ordinary in-facility lifts do not adequately eliminate or control the likelihood or severity of the following:
  - Personnel injury or significant adverse health impact either on or offsite of the facility.
  - Potential release of hazardous materials or other undesirable conditions.
  - Potential for unexpected damage that would jeopardize future operations or the safety of the facility or other Company asset.
  - Damage to a data gathering system that could result in loss of communication to a process or distribution control system.
  - Lift that requires exceptional care in handling because of the size, weight, close-tolerance, high susceptibility to damage, or other unusual factors.
  - If the total lift weight is equal to 75% or greater of the lifting device's gross capacity, this lift shall be considered as a critical lift.
  - Lift that requires the use of a suspended personnel platform.

- **Risk Assessment**

  - Before any crane lift is undertaken, an assessment using the criteria listed below shall be completed. One or more of the following conditions shall constitute a critical lift:
    - Lifting loads (with capability to rupture or breach equipment if dropped) over operating equipment containing hazardous material.
    - Lifting over control rooms or office buildings.
    - Lifting loads with high cost, long lead times, project critical path, or that would cause significant business interruption if lost or damaged.
    - Complicated lifts such as limited clearance, use of multiple cranes, or multiple maneuvers.

- **Critical Lift Safety Plan**
  - Contractor shall provide the written documented critical lift safety plan.
- **Pre-Lift Meeting**
  - Prior to the commencement of any critical lift, the contractor shall be responsible for attending a pre-lift meeting with Company's Representative to ensure all planning elements have been fulfilled and all affected personnel understand their duties.

## 6. Earth Moving Equipment (Dozers, Excavators) and Pipe-layers/Side Booms *(ANSI/ASME B30)*

- Contractors shall ensure only Qualified and Authorized operators operate excavators and pipe-layers in accordance with the owner's manuals, and all applicable regulations.
- All personnel shall keep clear of the swing radius, overhead hoists and any "blind" spots around the excavator.
- No equipment or vehicles shall be moved on any access roadway or grade unless the access roadway or grade is constructed and maintained to accommodate safely the movement of the equipment and vehicles involved.
- Bidirectional equipment shall have an operating horn.
- Spotters shall maintain communication and line of sight with the operator to prevent unplanned occurrences.
- Seat belts shall be utilized per manufacturer's instructions.
- When maneuvering excavators and pipe-layers from one location to another, the boom shall be collapse in a manner which shall not interfere with overhead structures.

## 7. Powered Industrial Truck – Forklift

- Contractors shall ensure only qualified Operators operate powered industrial trucks in accordance with manufacturer design, operating specifications and OSHA 29 CFR 1910.178


## 8. Powered Platforms, Manlifts, and Vehicle-Mounted Work Platforms

- All requirements shall conform to OSHA 29 CFR Subpart F.
- Contractors shall ensure only qualified Operators operate Powered Platforms, Manlifts and Vehicle-Mounted Work Platforms.
- Personnel shall wear fall harness with lanyards attached to proper tie-off points on the basket.

## 9. Overhead Powerlines (OHPL)

- Contractor must advise their employees of the location of any power lines, the hazards involved and the protective measures to be taken to ensure lines are not hit.
- Contractor must contact the local utility company and be aware of any special requirements. Contractor must also maintain the clearance to the power line following minimum clearance requirements.
- Mandatory controls to prevent utility strikes must include any 2 of the following controls:
  - Signage – "Beware of Overhead Lines" signs must be placed at equipment operator's eye level and must be a minimum of 2 feet by 2 feet.
  - Physical barriers – A non-conductive barrier, e.g. goal posts with rope and ribbons/flagging, must be set outside the limits of the approach on both upstream and downstream sides at a minimum of 10 feet.

- Dedicated spotter – A dedicated Contractor to monitor and direct traffic around and under lines. Must use an appropriate audible alarm such as an air horn to warn operators of the hazard.
- Utility controls – site specific controls; i.e. line insulators, line raising or outage(s).

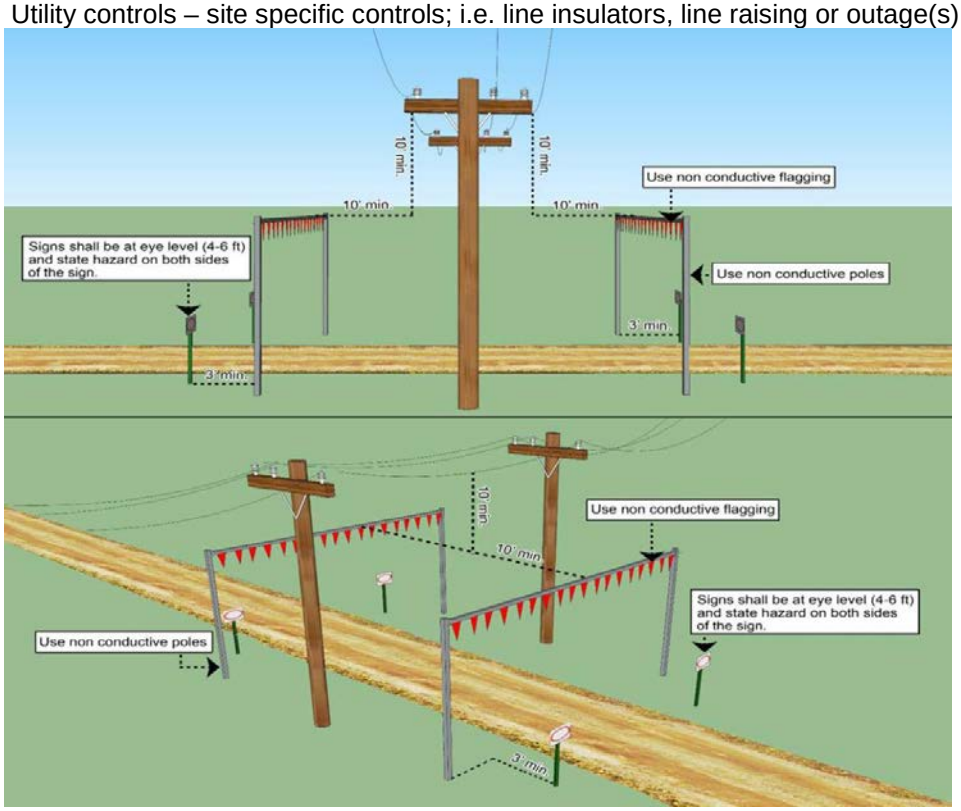


## 3.7 Ladder Safety

1. Ladders purchased and used on Company facilities should be of a design recognized by OSHA 29 CFR 1910 and/or 1926.
   - The ladders meet design standards referenced in A14.5–1992 “Safety Requirements for Reinforced Plastic Ladders”.

2. All portable ladders are a minimum of Class 1A rated for 300 lbs.

3. All ladders are inspected before each use.
   a. Damaged ladders are removed from service until repaired.
   b. Replacement of damaged or existing ladders (aluminum and wood) will be fiber glass.

4. When climbing up or down any ladder, face the ladder and maintain a 3-point contact with hands free of materials.

5. If work from a ladder is long term in nature or requires heavy physical exertion, other methods such as scaffolds or personnel lifts shall be used.

6. All metal ladders are labeled “NOT FOR ELECTRICAL USE”.

Workers will utilize fall protection when working six feet (6') to the heal or more above the nearest work service.

## 3.8 Confined Space Entry

1. Contractor / Subcontractor personnel are expressly forbidden from entering identified confined spaces, unless local Operations personnel have made the space safe for entry and provided evidence of this action through the issuance of an applicable Company, Confined Space Entry permit.

2. Each Contractor and their respective subcontractors shall identify and document all confined spaces (permit required or otherwise) located in designated construction areas as defined by applicable OSHA standards [i.e. 1910.146 General Industry or 1926.21(b)(6)(ii) and/or 1926.353(b) Construction]. Contractors and Subcontractors shall restrict access to all designated confined spaces by unauthorized and/or untrained personnel.

3. A space initially classified as a permit-required confined space may be reclassified as a non-permit confined space for the duration of an entry if the permit space poses no actual or potential atmospheric hazards and all physical hazards within the space are eliminated.

4. Contractor shall ensure the external and internal atmospheres have been tested (for oxygen, flammability, and potential toxic air contaminants) with a calibrated direct-reading instrument and documented on the Safe Work Permit as follows:

   - Before initial entry,
   - Before re-entry if the space is left unoccupied for a substantial period of time, such as during lunch hour or overnight and
   - At predetermined intervals specified on the Safe Work Permit.

5. Contractor shall ensure the confined space has been emptied, cleaned and ventilated to the extent possible prior to entry (if applicable).

6. It will be the responsibility of each Contractor and/or Subcontractor to provide for rescue services when required. Contractors and Subcontractors are expressly forbidden from listing, referencing or otherwise enlisting local emergency response entities to serve as rescue service providers unless the local emergency response entity has agreed, in writing, to provide confined space rescue services. If a written agreement is obtained from said emergency services, it must be presented to the appropriate Company Operations/Construction personnel for review and approval prior to making entry into a confined space that requires rescue services.

7. No **initial** confined space entry is allowed with an LEL above 0%. Non-hot work activities may continue between 0-5% LEL after initial entry.

   - If LEL rises above 5%, the entry permit shall be cancelled, work shall immediately stop and entrants shall leave the confined space.
   - All welding and cutting operations being performed in confined spaces will be in a 0% LEL atmosphere and adequately ventilated using forced-air ventilation to prevent the accumulation of toxic materials or possible oxygen deficiency.

8. When welding or cutting is being performed in any confined space the gas cylinders and welding machines shall be secured and left outside the space.

## 3.9 Personal Protective Equipment (PPE)

1. Contractor shall ensure implementation of OSHA 29 CFR 1910 Subpart I – Personal Protective Equipment.

2. All Contractors and Subcontractors are responsible for supplying and requiring the use of appropriate personal protective equipment and devices in all operations where there is an exposure to hazardous conditions or where the use of such equipment will reduce the risk of personal injury. PPE shall be maintained, on-site, in sufficient quantities to facilitate immediate outfitting of personnel on a daily basis. All PPE must meet the requirements of the appropriate American National Standard Institute (ANSI) program and be properly embossed.

### *Normal Work Clothing*

1. Basic PPE requirements for Company sites, include hard hats, safety glasses, safety toed shoes, long pants and shirts with a minimum one-quarter sleeves. Both pants and shirts must be made of natural fibers (i.e. cotton). Shirttails, long sleeves and other loose articles of clothing and jewelry shall be maintained in a way that does not allow entanglement in machinery/equipment that is rotating or otherwise in motion.

2. Fire Retardant clothing (FRC) may be required in certain locations. Contractors and Sub-contractors shall furnish FRC to their employees at no cost when required.

3. EXEMPTIONS for Welders Only:

   - Shirt-tails are NOT required to be tucked into pants.
   - Welding CAPS are NOT required to be made of a FRC fabric.

4. Specialized PPE may be required under certain circumstance as dictated by the hazards of the designated work (e.g. full-face shields, gloves, shin guards, snake chaps, metatarsal guards etc.). It shall be the sole responsibility of Contractor/Subcontractor to evaluate the need for specialized PPE and to supply said equipment at no cost to affected employees.

### *Eye and Face Protection*

1. Contractor shall ensure compliance with OSHA 29 CFR Part 1910.133 or 1926.102 - Eye and Face Protection.

2. Safety glasses are required at all times except in control rooms, vehicles and offices.

3. Equipment will conform to ANSI Z87.1 (latest edition) American National Standard for Occupational and Educational Eye and Face Protection.

### *Head Protection*

1. Contractor shall ensure compliance with OSHA 29 CFR Part 1910.135 or 1926.100 -Head Protection.

2. Wearing of hard hats is mandatory at all times except inside control rooms, office buildings and vehicles.

3. Head protection (Type 1 or 2—Class E) shall conform to ANSI Z89.1. Unique styled hardhats for example “Western” styled hardhat are not allowed.

### *Foot Protection*

1. Contractor shall ensure compliance with OSHA 29 CFR Part 1910.136 or 1926.96 - Foot Protection.

2. All Safety footwear shall meet ASTM F2413 –current version “Standard Specification for Performance Requirements for Foot Protection”.

3. Contractor shall ensure safety-toe type rubber boots are worn when working conditions require protection against corrosive materials and/or adverse weather conditions.

### *Hearing Protection/Conservation*

1. Contractor shall ensure compliance with OSHA 29 CFR Part 1910.95(i)(1) or 1926.101 - Hearing Protection.

2. Contractor shall ensure that their employees wear hearing protection whenever the work assignment exposes them to high noise level areas identified by Company.

3. Hearing protectors shall conform to ANSI S3.19 Standard.

4. Contractor shall administer a continuing, effective hearing conservation program, whenever employee noise exposures equal or exceed an 8-hour time-weighted average sound level (TWA) of 85 decibels.

5. Hearing protection is required at all times when operating or using any equipment emitting noise greater than 90 decibels.

### *High – Visibility Reflective Vests and Roadway Work Zones*

1. Reflective vests shall be made of flame resistant material.

2. All vests shall be at a minimum ANSI 107 (current version) High Visibility, Class 2 reflective vest.

3. The reflective vests will be worn when (not limited too):

   - Working in the roadway or within the Right-Of-Way of a roadway in which they are exposed to traffic or other vehicles using the roadway for purposes of travel;
   - Working around heavy equipment within the work area;
   - Working near road construction projects;

- Controlling access/egress point's within or near our facilities (i.e. traffic control);
- Assisting with emergency service activities.

## 3.10 Safe Work Practices—Tools and Equipment

### General Requirements

1. Contractors shall ensure they have been given proper authorization and direction by the Authorized Representative prior to commencing work.

2. Barriers must protect all process equipment, vessels, and lines when exposed to vehicle traffic.

3. Equipment such as pumps, fin fans, motor operated valves that are controlled remotely by automatic systems or switches must have a sign warning of the danger involved.

### Valves

1. Contractors shall never open or close a valve.

#### Blinds

1. When installing a blind, it is important to ensure that each contractor field verify each isolation point and/or provide means for later depressurizing both sides and verifying zero pressure in the event of blind removal.

#### Hydrostatic/Pneumatic Tests

1. All tests shall be completed in accordance with Enterprise Engineering Standards STD.4507, STD.4200 and STD.4403.

2. No personnel shall be in the ditch during pressuring or within the testing area if the pressure is above 50 percent of Specified Minimum Yield Strength (SMYS).

3. There shall be no public/contractor personnel or equipment working over a test section after the test pressure has exceeded the operating pressure.

4. Test equipment and personnel shall be positioned to minimize potential hazards. Typical positioning should include a barrier between the test equipment and test manifold and/or placement of test equipment a minimum distance of 50 feet from the test manifold.

#### Portable Hand/Power Tools

1. All tools, including employee owned tools, must be approved by the contract company and must be used for their intended purpose based on the manufacturer's recommendation.

2. Electric power operated tools shall either be of the approved double-insulated type or grounded in accordance with the manufacturer and/or regulatory requirements.

3. Never remove or modify any guards.

## 3.11 Safe Work Practices in Classified Areas

1. Classified Area is a location where fire or explosion hazards may exist due to flammable gases or vapors, flammable liquids, combustible dust, or ignitable fibers or flying's.

2. **Electronic/Electrical Devices** - Contractor shall ensure all electronic/electrical devices used in areas of concentrated flammable vapors, liquids, or gases shall be approved or designated as "intrinsically safe" for these locations in accordance with OSHA 29 CFR 1910.307 and the National Electrical Code.

3. Consistent with other Hot Work activities, a Safe Work Permit shall be issued designating that either initial, periodic or continuous atmospheric LEL monitoring is required when non-rated or uncertified electronic equipment or devices are used.

4. **Motorized Vehicles and Equipment** - Motorized vehicles and equipment (diesel, gasoline, LPG, electric) shall not be operated inside of classified areas unless:

   - A Safe Work Permit is issued for every entry of any vehicle or equipment into a classified area.

## 3.12 Safe Work Permit System

### *Issuing the Safe Work Permit*

1. Before any Permit is issued, it shall be the responsibility of an Authorized Representative and Contractor's employee requesting the Safe Work Permit to visit the work site together to:

   - Inspect the work area, identify the specific equipment/systems that shall be involved in the work
   - Verify that the equipment/system has been properly prepared for service and/or repairs.
   - Ensure all identified hazards involved with the work have been addressed.

2. The Safe Work Permit shall be issued by an Authorized Representative.

3. A separate Safe Work Permit shall be issued for all First Line Breaks in accordance with SPM 6.3 - *Preparation of Equipment and Systems for Maintenance and Repair*.

### *Posting of Permit*

1. Each permit shall be made in duplicate.

   - The Field Copy (Yellow) will be given to Contractor who requested the permit or who is performing the work.
   - The original shall remain with the Authorized Representative.

### *Duration of Permit*

1. A permit is only valid for the period specified on the permit.

2. Permits shall be issued for a time specified not to exceed 12 hours. The permit may be updated for an additional 12 hours.

3. Permits will expire after 24 hours from initial issuance and shall require that a new permit be issued if the work is to be continued.

### *Closing Safe Work Permit*

1. Contractor's representative who perform work authorized by the permit must:

   - Notify the Authorized Representative when all permitted work is completed.
   - Document the time completed on the field copy.
   - Return the field copy of the permit to the Authorized Representative.

### *Hot Work Requirements*

1. If practical, hot work should be relocated to a safe work area.

2. If the hot work activities cannot be relocated all moveable combustible material must be moved outside a 35' radius from the hot work area

3. If combustible material cannot be moved it must be covered with fireproof canvas/blankets and/or wetted.

4. Barricades or barriers must be provided below any elevated burning or welding activities.

5. Valves, open ended piping, flanges, and equipment, as well as, drains, ditches, trenches, sumps and other low-lying areas within a 35' radius of the job site will be tested with a combustible gas monitor to ensure a safe atmosphere around any welding or spark producing operations.

6. Contractor shall provide a dedicated fire watch with appropriate extinguisher(s) whenever grinding, welding, or cutting is performed in locations where a fire might develop.

   - A fire watch will be maintained for at least thirty (30) minutes after completion of welding or cutting operations to detect and extinguish possible smoldering fires.

7. Hot tap and stopple work requires an assessment by the Engineering Department.

8. Temporary Hot Work Stoppages

   - If the workers will be leaving the work area for a period of 30 minutes or longer, they must take the following safeguards:
     - Equipment must be turned off.
     - Gas units are turned off at the source and the hose line(s) bled safely and disconnected from the fuel gas source.

   - When practicable, the torch and hose must be removed from confined spaces during work stoppages.

9. Contractor shall verify the initial atmospheric monitoring is performed just prior to job activities and the Atmospheric Monitoring section of the Safe Work Permit is completed.

    - Contractor shall ensure atmospheric monitoring is completed before continuing work after any Temporary Hot Work stoppages.

    - Special attention needs to be paid to the potential for presence of any pyrophoric material. Pyrophoric material typically appears as a fine solid powder or rouge deposit in piping or equipment and can be entrained in sludge. Pyrophoric material can be found in filters, scrubbers, piping, pig traps and other equipment.

## 3.13 Scaffolding

1. Contractor shall ensure all scaffolding is erected under the direction of a "Competent Person" as defined in OSHA 29 CFR 1926, Subpart L - Scaffolds.

2. During construction of the scaffolding, Contractor's competent person shall ensure that fall protection is worn by each employee and shall ensure 100% tie-off.

3. Scaffolds above 4 feet and having restricted work area shall also have toe-boards and approved railings.

4. Contractor will provide overhead protection from falling objects using protective netting or other adequate means of protection working on or near the erected scaffolding.

5. A designated competent person shall inspect each scaffold erected. Colored tags (red, yellow, green) shall be utilized to identify the condition/status of a given scaffolding structure.

## 3.14 Stop Work Authority/Obligation

1. This section establishes the Stop Work Authority/Obligation (SWA/O) for all Contractors to suspend individual tasks or group operations when the control of an EHS&T risk is not clearly established or understood.

2. All Contractors have the authority and obligation to stop any task or operation where concerns or questions regarding EH&S risk exist;

3. No work shall resume until all stop work issues and concerns have been adequately addressed.

## 3.15 Abrasive Blasting

1. Contractors must ensure all abrasive blasting operators use only abrasive blasting respirators that meet the criteria described in Section 4.14 of this document to protect employees from dust produced during abrasive-blasting operations. The use of silica based abrasive blasting materials should be minimized where possible.

2. Operators shall be equipped with heavy canvas or leather gloves and aprons or equivalent protection to protect them from the impact of abrasives.

3. Portable air compressors or other approved and verified/tested breathing air sources that supply ambient Grade D air in accordance with 29 CFR 1910.134(i), used in conjunction with an ambient Grade D breathing air filtration system and a monitor that shall alert to off-spec air, under limited circumstances may be used to supply ambient Grade D breathing air.

4. The filtration system shall be properly inspected on a monthly basis, and the associated filters shall be checked for effectiveness at that time and replaced if needed.

5. Supplied air from a compressor must be tested to verify it supplies ambient Grade D air and shall be tested for oxygen, carbon monoxide, carbon dioxide, and hydrocarbon content:

   - At least once a month,
   - Each time the compressor is moved to a new location, and
   - Each time the compressor receives maintenance or repairs requiring a breach of the system.

### 3.16 Barricades

1. Contractor shall erect and maintain temporary barricades, warning signs and flashing lights as required by federal, state and local roadway regulations around ditches and excavations within the roadway right-of-way; and as required by OSHA 29 CFR 1926.202.

2. Any temporary removal of plant or other work site fencing shall not be left unattended.

# Section 4 – Industrial Hygiene Procedures and Programs

### 4.1 Industrial Hygiene

1. Contractors who will perform services on Company assets and may have a potential to be exposed to certain toxic substances or harmful physical agents may be required to perform industrial hygiene monitoring for their employees.

2. Below are included, but not limited to substances and agents that may be encountered while working in Company's facilities

### 4.2 Asbestos

1. All Contractors who perform asbestos abatement services, including maintenance and repair services, will have this activity in their approved Master Service Agreement (MSA) scope of work.

2. A qualified and approved Contractor shall provide a competent person as defined in 29 CFR 1926.1101(b) supervising all asbestos activities.

### 4.3 Benzene

1. Contractors performing work tasks/activities where the risk of exposure to benzene exists are required to wear respiratory protection equipment as a precautionary measure if checks/test cannot be performed prior to opening of equipment.

## 4.4 Hydrogen Sulfide (H2S)

1. Before Contractor begins work, Company must inform Contractor if the facility stores, handles, or processes products that may have the potential to contain H2S in concentrations above 10 ppm and documents such communication on the Safe Work Permit.

   - Contractors shall follow their own hydrogen sulfide programs which meet or exceed Company policies, and which include job procedures, training, PPE, and required certifications/licenses.

2. Contractors are required to provide, and contract personnel are required to use, the appropriate level of personal protective equipment (PPE) required for the job as identified by the hazard assessment (i.e., respiratory protection).

3. Contractors shall provide properly calibrated and bump tested personal H2S monitors for each of their employees to reduce potential exposure. In areas where potential concentrations of H2S may be present, applicable monitoring must be conducted using appropriate air monitoring equipment.

4. Contractor shall be notified as far in advance as possible if there is H2S level of 10 PPM or higher in a work area.

**Note: Only a Self-Contained Breathing Apparatus (SCBA) or other Supplied Air Respirator (SAR) shall be utilized in work areas where exposures to H2S may be greater than or equal to 10 ppm while performing maintenance tasks. Never use any type of canister/cartridge Air Purifying Respirator (APR) in an H2S environment for protection from H2S.**

5. The use of the Buddy System is mandatory whenever personnel may reasonably expect to be exposed to atmospheres at or above 100 ppm H2S, even if respiratory protection is being utilized.

6. All personnel shall evacuate the hazardous area immediately if a personal H2S monitor alarms on a location while the person is working without wearing supplied air respiratory equipment.

## 4.5 Lead

1. All Contractors who perform lead abatement services, including maintenance and repair services, will have this activity in their approved Master Service Agreement (MSA) scope of work. Contractor shall not subcontract any lead abatement services to any other company or contractor.

2. Company must inform Contractor of the presence of lead and document such communication.

   - Contractors maintain and follow their own Lead Programs in accordance with 29 CFR 1910.1025 and 29 CFR 1926.62, which shall include job procedures, training, monitoring (if applicable), PPE, certifications/licenses, etc.

3. Qualified and approved contractors shall provide a competent person as defined in 29 CFR 1926.62(b) supervising all lead activities.

4. Coatings are tested before their removal to determine safe work practices and the appropriate level of personal protective equipment (PPE) required for the job, (e.g., respiratory protection and protective clothing).

5. Contractors shall provide site cleanup and removal of expendable abrasives and other lead-containing waste as per 29 CFR 1926.62 and 29 CFR 1910.1025.

## 4.6 Naturally Occurring Radioactive Material (NORM)

1. Company shall only utilize a Contractor who is qualified to handle NORM contaminated or potentially NORM contaminated material. Contractors must be informed of the potential risk, have the proper License (as may be required by a specific state), and are qualified to perform the job.

2. Contractor shall ensure that proper personal protective equipment (PPE) is worn for any job/task being performed on NORM-contaminated equipment or suspected NORM-contaminated equipment.

3. Contractor shall ensure that employees under their purview are trained and aware of the potential NORM hazards and those proper precautions are taken if results of any monitoring event indicate that radiation levels are at or greater than 50 µR/hr (external), 150 cpm (internal) or 150 pCi/g of scale and/or sludge.

## 4.7 Mercury

1. Some Company facilities may have a potential exposure to mercury.

   - The type of mercury most likely to be encountered is elemental mercury, also known as quicksilver, metallic mercury, or instrument grade mercury.

2. Company shall inform Contractor if mercury may be present on site, and documents such communication on the Safe Work Permit.

3. If there is a potential for employees under Contractor's purview to be exposed to mercury, they must have received mercury awareness training.

4. If employees under Contractor's purview are providing mercury cleanup services, they must follow an established mercury program provided by Contractor.

   - Contractor shall be responsible for the proper selection and use of PPE in accordance to their policy.

## 4.8 Bloodborne Pathogens

1. Any Contractor employees who provide medical care or voluntarily administer first aid on Company property shall follow a written Bloodborne Pathogens Exposure Control Plan in accordance with 29 CFR 1910.1030.

## 4.9 Flammable and Combustible Materials

### *Flammable and Combustible Liquids*

1. Contractors who require the use of flammable and combustible liquids during their work tasks shall be required to adhere to the following guidelines.

2. Only approved containers and portable tanks shall be used for storage and handling of flammable and combustible liquids.

   - Approved safety cans or Department of Transportation approved containers shall be used for the handling and use of flammable liquids in quantities of 5 gallons or less, except that this shall not apply to those flammable liquid materials which are highly viscid (extremely hard to pour), which may be used and handled in original shipping containers.
   - For quantities of one gallon or less, the original container may be used for the storage, use and handling of flammable liquids.

3. Flammable or combustible liquids shall not be stored in areas used for exits, stairways, or normally used for the safe passage of people.

4. Flammable or combustible liquids shall be stored at least 20 feet from the property line.

5. No more than 25 gallons of flammable or combustible liquids shall be stored in a room outside of an approved storage cabinet.

6. Quantities of flammable and combustible liquid in excess of 25 gallons shall be stored in an acceptable or approved cabinet meeting the following requirements:

   - Cabinets shall be labeled in conspicuous lettering “FLAMMABLE KEEP FIRE AWAY”.
   - Not more than 60 gallons of flammable or 120 gallons of combustible liquids shall be stored in any one storage cabinet.
   - Not more than three such cabinets may be located in a single storage area.

7. Outside storage of containers (not more than 60 gallons each) shall not exceed 1,100 gallons in any one pile or area.

### *Compressed Gas Cylinders*

1. Contractor shall ensure cylinders used at facilities are handled, stored and maintained in accordance with Department of Transportation (DOT) 49 CFR Part 178 and OSHA 29 CFR Part 1910.253 – “Oxygen-fuel gas welding and cutting”.

2. Where cylinders must be handled by a crane or derrick, carry them in a cradle or suitable platform and take extreme care that they are not dropped or bumped.

   - Do not use slings

3. Contractor shall not use a cylinder of compressed gas without a pressure reducing regulator attached to the cylinder valve, except where cylinders are attached to a manifold, in which case the regulator should be attached to the manifold header.

4. Contractor will use backflow check valves on oxygen and acetylene lines.

5. Contractor shall ensure oxygen cylinders are stored at least 20 feet from cylinders containing flammable gases or the location of other flammable/ combustible materials.

   - If closer than 20 feet, cylinders shall be separated by a fire-resistive partition at least 5 feet high and that has a fire-resistance rating of at least 30 minutes.

6. Contractor shall ensure empty cylinders are stored in a designated area, with valves closed, protective caps on, and marked EMPTY or MT.

## 4.10 Hazard Communication

1. Contractor shall have an established written Hazard Communication Program in compliance with the OSHA Hazard Communication Standard (29 CFR 1910.1200).

### *Precautionary Measures*

1. As part of Enterprise Products Hazard Communication Program, Contractor personnel shall be informed during the site-specific safety orientation of any hazardous materials located in Contractor's immediate work area, the associated hazards involved and the applicable safety practices and precautionary measures established to prevent/protect against exposure, as well as emergency reporting procedures and alarms, evacuation routes, designated assembly areas, etc.

### *Safety Data Sheets (SDS)*

1. Safety Data Sheets are maintained and accessible on Company's computerized network for review of pertinent data relative to each material in the work area.

2. Any hazardous materials brought into the facility shall be accompanied by an SDS.

### *Labeling System*

1. In recognition of the importance of hazard identification and awareness, most storage and in-process tanks are labeled to identify product/chemical content, and these labels correlate with the Safety Data Sheets maintained on Company's computer network.

## 4.11 Hazardous Materials

1. Those Contractors working around certain hazardous materials must have a policy in place to identify, handle and respond to circumstances involving hazardous materials.

2. Contractors must ensure their employees are trained on hazard characteristics, material handling, and emergency response for those materials they could come in contact with.

3. If more information is needed to perform training or perform any work task(s) refer to the SDS or contact a Company representative.

## 4.12 Radiation Safety

1. Only properly trained, qualified personnel are allowed to use radiation-producing or radiation-monitoring equipment or materials on facilities. Contractor must maintain records of all training and qualifications.

2. Contractor shall place radiation warning devices and signs containing the internationally recognized symbol for radiation around the perimeter of any area which may be affected by radiation.

3. When radiographic equipment or radiation detectors are used, Contractor must ensure the area is clear, barricaded and all personnel are at a safe distance from the radiation source.

## 4.13 Respiratory Protection

**Note: Blended/synthetic air is not allowed at any Enterprise Products facility or location.**

1. Contract personnel who have the potential of utilizing respiratory protective devices shall comply with this section. They must:

   - Use their Contractor-provided respiratory protection equipment and be responsible for ensuring that it meets the requirements listed in OSHA 29 CFR 1910.134(d),
   - When applicable, supply a copy of the Certificate of Analysis (COA) from the supplier of their breathing air that certifies that the breathing air meets at least the minimum requirements for Grade D breathing air in accordance with 29 CFR 1910.134(i).
   - Equipment shall conform to ANSI Z88.2 Standard.

## 4.14 Heat Illness

1. Contractors shall have a Heat Illness Prevention procedure to ensure safe work practices when working in conditions of elevated heat levels. Contractor's management shall ensure employees have adequate water/electrolyte solutions, rest periods and shade when environmental risk factors for heat illness are present.

## 4.15 Waste Handling - General Requirements

1. Contractor shall be responsible for the proper containment, handling, and disposal of any waste generated as a result of its work in any facility or work site.

2. Waste is defined as any chemical or petroleum waste or the residue of any oily substance contained in "empty" containers; wastewater, soil, sludge, used absorbent materials, air emissions, asbestos and paint removal wastes (abrasive blast residue).

3. Contractors must not store more than 55 gallons / 208 liters of hazardous waste or one quart of acutely hazardous waste without Company's written approval. Clearly label waste containers contents.

### 4.16 Waste Generation - Disposal

1. Under no circumstances will any petroleum or chemical waste be intentionally discharged onto the ground by the contractor. Contractor shall ensure that a sufficient number of appropriate containers are on hand to contain wastes generated as a result of its work.

2. Under no circumstances shall Contractor discharge any hydrocarbon or chemical emissions to the air from any vessel, pipeline, or any other equipment.

3. Contractor shall notify a Company representative of any petroleum or chemical waste observed being generated or released from equipment belonging to Company in the course of the work.

4. Contractor shall immediately notify Company's representative of any inadvertent petroleum or chemical spills to the ground or any hydrocarbon or chemical releases to the air.

5. Paint, lead, mercury, and asbestos removal waste must be identified before disposal.

## Section 5 – Emergency Preparedness

### 5.1 Fire Prevention

#### *Flammable Liquids*

1. All flammable liquids used by Contractor in any facility shall be stored in approved and labeled metal safety cans.

2. Containers/tanks for bulk storage of flammable liquids shall be in accordance with OSHA regulations. All Flammable bulk containers shall have flame arrester type vents and self-closing discharge outlets. All bulk storage containers shall be placed in adequate secondary containment. A 20 lb. (minimum) dry chemical fire extinguisher shall be provided at all bulk storage containers where flammable liquids are dispensed

3. Containers shall be clearly marked as to the contents and "No Smoking" signs posted in the adjacent area.

4. Proper grounding and/or bonding shall be provided in accordance to OSHA standards.

5. Drip pans shall be provided for any oil dispensing drums used by Contractor.

#### *Notification of Intent*

1. Contractor shall obtain prior approval from the Facility Owner for any work which entails:

- Shutting off water or fire mains,
- Blocking a roadway so that firefighting equipment cannot pass,
- Blocking access to fire equipment or hydrant(s), and/or
- Blocking of, removal of, or changes to any exit or fire escape.

### *Smoking Policy*

1. Smoking of any kind, including cigarettes, cigars, pipes, and electronic cigarettes, is prohibited in all operating areas, buildings, and offices. Smoking is only allowed in designated smoking areas. All smoking pens/areas shall have at least one ABC fire extinguisher, butt can, and trash can with a lid furnished by Contractor.

### Emergency Egress (Exits)

1. Every exit shall be clearly visible, or the route to it identified in such a manner that everyone shall know the direction of escape from any point. Exits will be marked by a readily visible sign.
   - Each exit sign (other than internally illuminated signs) shall be illuminated by a reliable light source providing not less than 5 foot-candles of illuminated surface.

**Note: At no time will exits be blocked.**

2. Any doorway or passageway which is not an exit or access to an exit but which may be mistaken for an exit shall be identified by a sign “NOT AN EXIT” or a sign indicating actual use (e.g. “Storeroom”).

## 5.2 Fire Protection

### *Buildings and/or Trailers*

1. All Contractor buildings and/or trailers shall be identified with signs, equipped with necessary fire extinguishers, and equipped with locks to prevent theft.

2. Any temporary building and/or trailer shall be properly tied down to protect against high winds and have proper steps, landings and handrails.

### *Fire Extinguishers*

1. Contractor will inspect and maintain a fire extinguisher(s) (per NFPA 10 guidelines).

2. Contractor shall provide fire extinguishers for each temporary office, tool room, or storage room.

3. Contractor shall provide a fire extinguisher at each welding and/or cutting job-site.

4. The minimum size of the extinguishers shall be 20 lb. dry chemical.

## 5.3 Emergency Action Plans and Alarms

### *Emergency Action Plans*

1. Contractor will be required to review and follow Company site-specific Emergency Action Plans (EAP).

2. Emergency Response Plans (ERP) shall be written in English and state the response requirements of Contractor and Subcontractor personnel. ERPs shall not conflict with existing Company ERP's. If not included in the site Emergency Action Plan Contractor/subcontractor's ERP shall, at a minimum address the following:

   - Emergency reporting and notification requirements (e.g. fire / medical / compromised utilities)
   - Identification of appropriate emergency response activities (e.g. fire response / civilian or employee injury)
   - Identification of appropriate emergency response organizations that may be called to respond during an emergency
   - Alarm and evacuation plans relevant to the project construction site
   - Assignment of roles and responsibilities to key personnel
   - Development of an emergency contact list and establishment of posting requirements
   - Location of Muster / Assembly Points
   - Interface protocol for construction and facilities personnel

### *Fire Emergencies*

1. If Contractor discovers a fire, they must notify a Company representative immediately.

### *Flammable Gas/Liquids Releases*

1. Upon notification of a major release of flammable vapors, Contractor shall immediately shut down all sources of ignition under their control, if it can safely be done without entering the spill or release area. Immediately notify Operations of the situation.

2. All personnel shall immediately evacuate the danger area to an upwind assembly/muster area.

## 5.4 Medical Treatment and First Aid Services

1. Contractor shall ensure "site-specific" Emergency contact information is available while on Company locations.

# Section 6 – Operations and Maintenance

## 6.1 Job Plan

1. A Job Plan (SF20) is required for work that does not have an established written procedure associated with those higher risk work activities requiring atmospheric depressurization, opening process piping, exposed energized electrical equipment or commissioning new or

existing equipment.

2. If the work activities require a Job Plan, Contractor must attend the Job Plan meetings prior to work beginning. Company shall provide Contractor a copy at the Pre-Construction meeting.

3. Any deviations from the original approved Job Plan must be submitted to Company's Representative for review and approval.

## 6.2 Preparation of Equipment and Systems for Maintenance and Repair

1. Contractor shall verify all permits have been issued and all precautionary measures indicated on the permit have been implemented.

2. Contractor shall locate/position all support equipment capable of being an ignition source (i.e. engine driven compressors, welding machines, light plants and other motorized equipment) a minimum of 50 feet from work areas as well as upwind/crosswind and at a higher elevation when possible.

3. Contractor shall verify the line or equipment has been properly decommissioned, locked and/or tagged out by a Company representative before performing work.

4. Contractor must ensure they utilize only those approved plugs identified by Company.

## 6.3 Cutting Underground Lines

1. Contractors involved in cutting of underground lines must ensure all applicable requirements of the following Company Safety Policies are followed:

    - Preparation of Equipment for Maintenance and Repair (Section 6.3)
    - Excavation and Trenching (Section 3.4)
    - Energy Isolation (Lockout/Tagout) (Section 3.3)
    - Safe Work Permit (Section 3.12)
    - Cutting Underground Lines (Section 6.4)

2. An "Underground Line Cutting Checklist" (SF34) form associated with a detailed job plan is prepared by the department requesting the work to be done. All forms and policies will be provided by a Company representative.

## 6.4 Safe Operation of Vacuum Trucks

1. The vacuum truck operators must complete the "Vacuum Truck Safety Checklist" (SF56) form prior to work commencing.

2. Contractor personnel shall comply with applicable standards pertaining to the safe operation of vacuum trucks. This is accomplished through the recommended practices addressed in ***API RP 2219 – "Safe Operation of Vacuum Trucks in Petroleum Service"***.

## 6.5 Greenfield and Brownfield Determination

1. This section is intended to provide clarity around the applicability of Contractor or Company safety policies such as job planning, safe work permitting and equipment preparation in construction work areas (e.g. Greenfields or Brownfields).

2. *Greenfield*: New construction not affecting existing assets where Company's Safety Policies do not apply.

3. *Brownfield*: Construction or contractor work that could partially affect existing assets as defined in a Brownfield agreement and require application of pre-identified Company Safety Policies.

4. *Fully Permitted*: Work conducted inside the fence, within 12 feet of above-ground unfenced assets, or within Company-defined excavation tolerance zone (unless otherwise defined in a Brownfield agreement). Fully permitted requires the application of all active Company Safety Policies.

5. Contractor shall supply and comply with their safety policies procedures when the construction activity is deemed Greenfield.

6. Work conducted in a Brownfield project site utilizes a combination of Company and Contractor-supplied safety policies as defined in the Brownfield agreement.

7. All construction activities require a Safety Plan from Contractor (s) (reviewed and approved by Operations and Safety).

## 6.6 Utilities (Electrical Lines, Power, Water and Fuel)

1. Contractor will not make up connections, either temporary or permanent, to any electrical power, water (potable and fire water), air, steam, nitrogen, or fuel lines without specific approval of Company's representative at the location where work is being performed.

# Section 7 – Environmental

## 7.1 General

2. Contractor must participate in and comply with all applicable project-specific environmental training prior to commencing work.

3. For projects on which Company has designated an Environmental Inspector, Contractor shall recognize that the Environmental Inspector has the authority to stop activities that violate environmental conditions, state/provincial or federal environmental permit requirements, or landowner requirements; and to order appropriate corrective action.

4. Contractor must use only approved access roads and stay within approved and designated working, staging, temporary use, and parking area boundaries.

5. Contractor shall perform refueling and equipment maintenance activities only in approved areas.

6. Contractor must perform work in a manner that prevents effects of soil erosion and sedimentation in compliance with applicable laws, regulations, permits, and Company requirements. Separate and replace topsoil in accordance with project requirements. Erosion and sediment control must be installed, inspected and maintained to contain soil on the construction site and away from wetlands and water bodies. Disturbed areas must be stabilized and re-vegetated where applicable, as soon as possible following construction in compliance with permit conditions and Company's requirements or in accordance with landowner requirements.

7. Contractor must not collect or disturb indigenous plants, wildflowers, cultural artifacts, fossils or human remains in compliance with historic preservation laws, regulations, permits or Company requirements. If artifacts, fossils or remains are discovered, work must stop immediately in the areas of the discovery and a Company Representative must be notified.

8. Contractor must not agitate, take, feed or otherwise harm wildlife (mammals, birds, snakes, etc.), or livestock.

9. All Contractors who meet the requirements for needing a Spill Prevention Control and Countermeasure plan (SPCC) must comply with all plan requirements.

10. Company facility/premises may be required to follow applicable Air Permit requirements.

## 7.2 Spill Prevention and Control

1. Contractor shall minimize the risk of spills or releases to the environment using appropriate protective procedures (e.g., secondary containment, double containment, employee training, overflow protection, and other measures) on Company property.

2. Prior to discharge from a containment system, inspect the primary container for signs of leaks. A Company Representative must be notified and given the opportunity to be present prior to discharging of any containment system.

## 7.3 Discharge to Storm-water Conveyance Systems

1. All discharges to a permitted storm water conveyance system must be in compliance with the applicable permit and Storm Water Pollution Prevention Plan (SWPPP).

2. Non-storm water discharges are NOT permitted unless approved by the Company.

3. An unauthorized or unpermitted non-storm water discharge is considered a release and must be reported and documented in accordance with the accident/incident and spill notification procedures.

4. Contractor must maintain a log indicating the individual making the observations, description of accumulated storm water, and the date and time of release. Maintain logs daily, monthly and yearly as outlined in the regulation. Submit a copy of the log to Company monthly.

## 7.4 Erosion Control

1. Appropriate erosion and sediment control measures must be in place prior to ground breaking or any condition that could cause silt to enter a sewer, wetland, or water body.

## 7.5 Excavation Activities in Environmentally Restricted Areas

1. In areas outlined in the general site drawings as environmentally restricted or identified as environmentally sensitive (e.g., parks, water bodies, areas containing migratory birds, etc.), excavations are prohibited unless Company approves in writing. If an area is marked on the drawings or delineated on site as an exclusion zone, do not enter the area without expressed authorization.

## 7.6 Open Burning

1. Unless otherwise specified, open burning of debris on Company property is prohibited.

## 7.7 Working Near Waterbodies and Wetlands

1. Contractors must minimize disturbance of water bodies and wetlands by ensuring that all proper permits have been obtained and reviewed prior to commencement of work activities and ensuring that proper precautions are taken to minimize vegetation loss and impact to water quality and compliance with the permit.

2. Do not drive through open water bodies or wetlands.